

P/N: ER25500S
 SIZE: C

HIGH PERFORMANCE LITHIUM CELL
 Lithium Thionyl Chloride (Li/SOCl₂)

CROSS REFERENCE
 TLH-5920, 4302, 26-48-150MR

CELL SPECIFICATIONS

Nominal voltage (@25°C):	3.6V
Rated capacity (discharged at 100mA @150°C, cut-off voltage 2.0V):	4.2Ah
Max current to achieve 100% capacity:	100mA
Typical weight:	55g
Cell volume	24cc
Cell diameter (max.):	25.0mm
Cell length (max.):	50.0mm
Operating temperature range:	-20°C to +150°C -4°F to 302°F


Features

- Stainless steel container
- Hermetic glass-to-metal sealing
- Low self discharge
- High rate performance


Applications

- Oil fields
- Exploration
- Aerospace
- Marine
- Detectors / monitors
- Data loggers
- Test equipment



Cell Voltage versus Current and Temperature

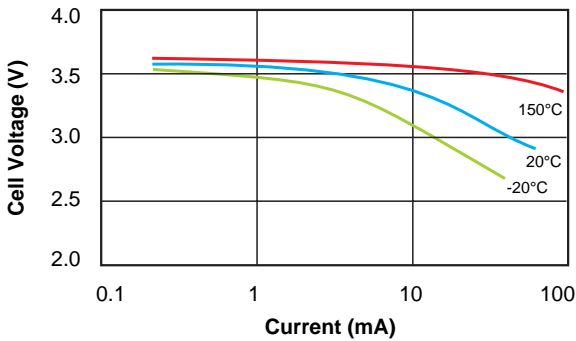

Capacity versus Current and Temperature

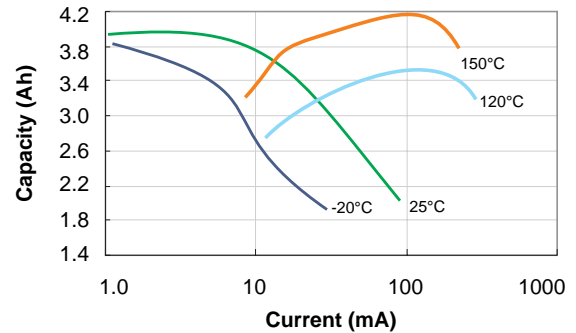

150°C Discharge Performance

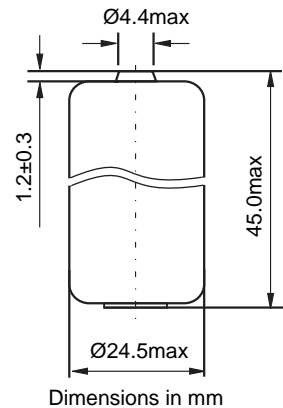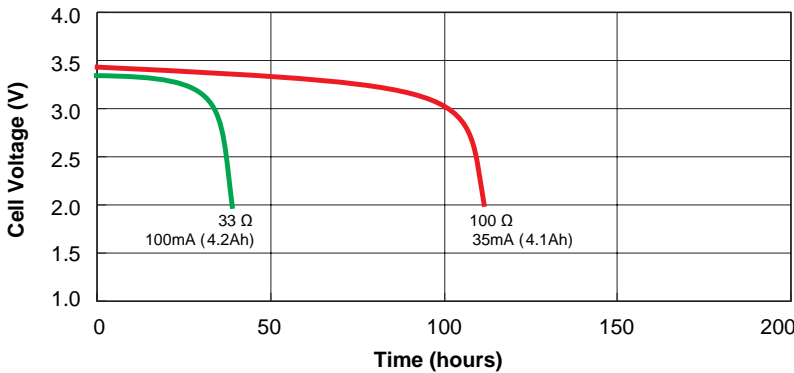

Custom terminations available upon request

Product specifications are subject to change without prior notice. Any presentation in this data sheet concerning performance is for information purpose only and not warranties, either expressed or implied, of future performance.